

DSE2157

DSENET[®] OUTPUT EXPANSION MODULE

The DSE2157 is an output relay expansion module for use with DSENet[®] compatible control modules. The DSE2157 has been designed to extend a host module's output capabilities.

A maximum of 10 DSE2157's can be connected to an individual module at any one time. All outputs are configurable via the host controller.

The additional output capabilities of the DSE2157 give OEMs the flexibility to meet increasingly complex industry specifications. The module incorporates 'DIN' rail and chassis mountings allowing convenient fixing into a panel.

The module will work up to 1 KM (0.6 miles) from the host control module.

ENVIRONMENTAL TESTING STANDARDS

ELECTRO-MAGNETIC COMPATIBILITY

BS EN 61000-6-2
EMC Generic Immunity Standard for the Industrial Environment
BS EN 61000-6-4
EMC Generic Emission Standard for the Industrial Environment

ELECTRICAL SAFETY

BS EN 60950
Safety of Information Technology Equipment, including Electrical Business Equipment

TEMPERATURE

BS EN 60068-2-1
Ab/Ae Cold Test -30 °C
BS EN 60068-2-2
Bb/Be Dry Heat +70 °C

VIBRATION

BS EN 60068-2-6
Ten sweeps in each of three major axes
5 Hz to 8 Hz @ +/-7.5 mm,
8 Hz to 500 Hz @ 2 gn


HUMIDITY

BS EN 60068-2-30
Db Damp Heat Cyclic 20/55 °C @ 95% RH 48 Hours
BS EN 60068-2-78
Cab Damp Heat Static 40 °C @ 93% RH 48 Hours

SHOCK


BS EN 60068-2-27
Three shocks in each of three major axes
15 gn in 11 ms

COMPREHENSIVE FEATURE LIST TO SUIT A WIDE VARIETY OF GEN-SET APPLICATIONS

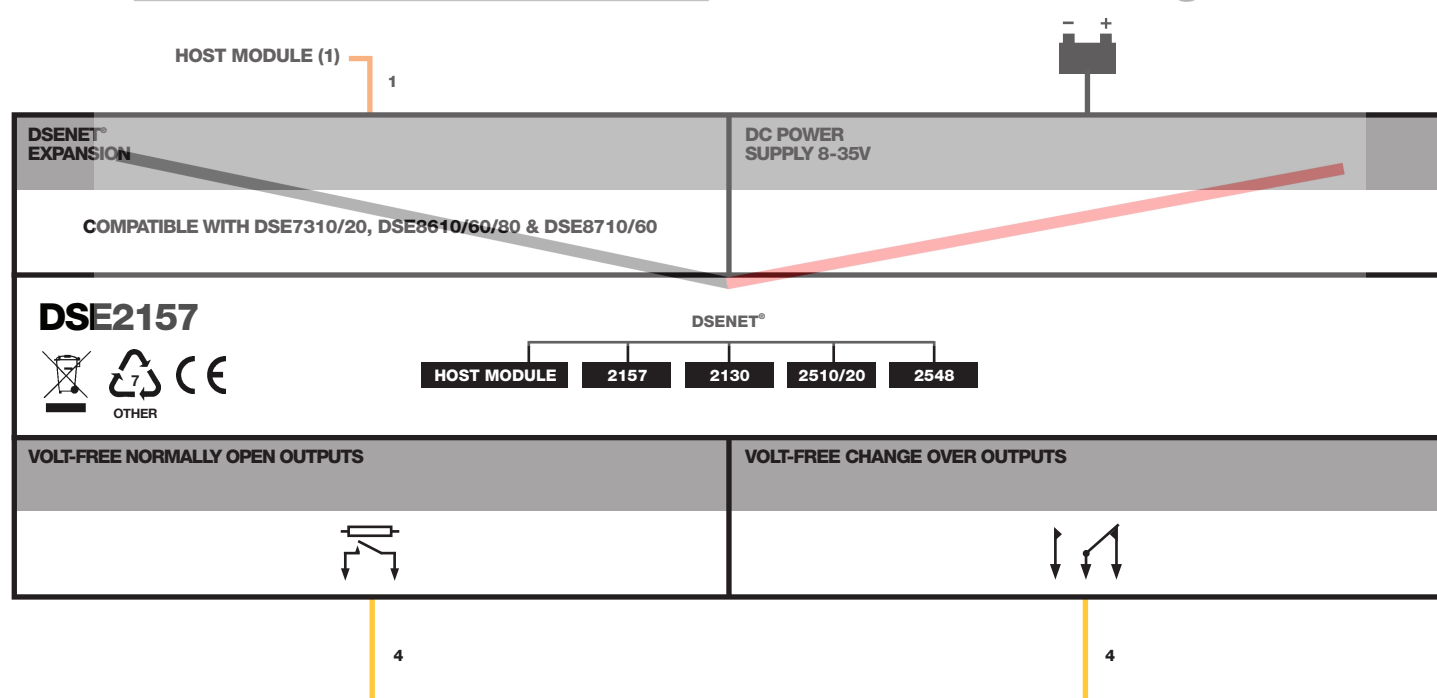

DSE2157

DSENET[®] OUTPUT EXPANSION MODULE

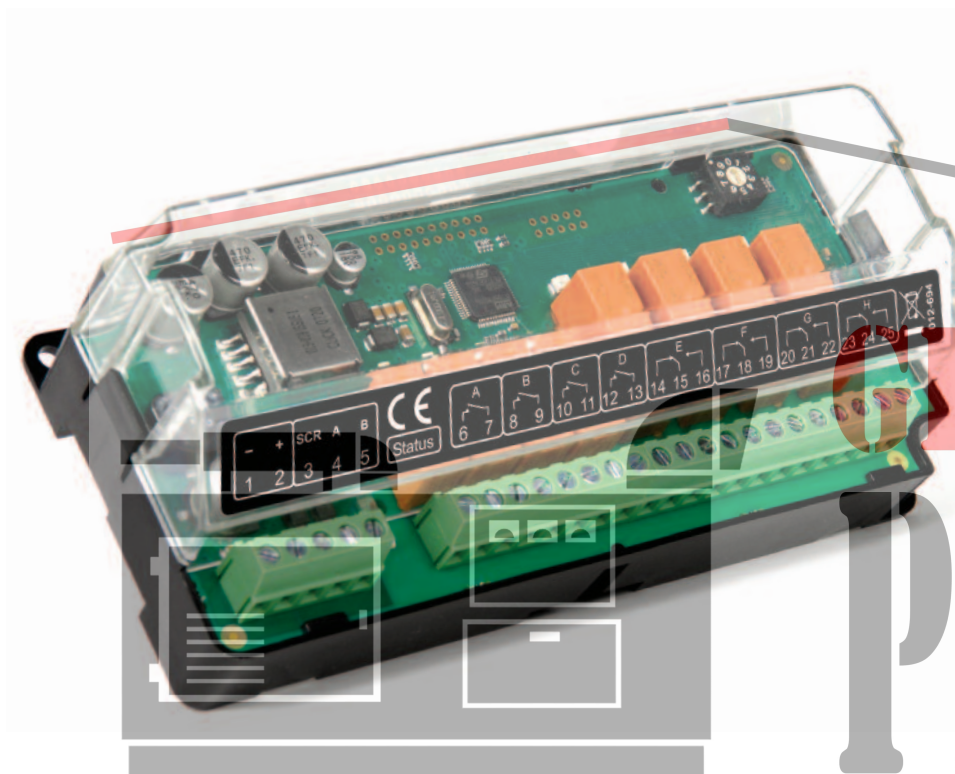

SPECIFICATION

DC SUPPLY
CONTINUOUS VOLTAGE RATING
8 V to 35 V Continuous

CRANKING DROPOUTS
Able to survive 0 V for 50 mS, providing supply was at least 10 V before dropout and supply recovers to 5 V. This is achieved without the need for internal batteries. LEDs and backlight will not be maintained during cranking.

MAXIMUM OPERATING CURRENT
325 mA at 12 V, 152 mA at 24 V

MAXIMUM STANDBY CURRENT
70 mA at 12 V, 32 mA at 24 V

AUXILIARY RELAY CONTACTS
2 Amp DC rated voltage free

DIMENSIONS
OVERALL
165 mm x 76 mm x 49 mm
6.5" x 3" x 1.9"

KEY FEATURES

- Power On/Link Lost LED ID SWITCH
- 10 expansion modules can be connected to 1 host controller at a time
- 8 configurable relay contacts with LED indicators:
 - 4 Normally Open (N/O)
 - 4 Change Over (C/O)
- Terminal strip connection for quick and easy set-up

ID SWITCH

The rotary ID switch is used to select the address of the DSE2157 expansion module, as the host control module is capable of giving instructions to a number of DSE2157 expansion modules at the same time.

RELATED MATERIALS

TITLE
DSE2157 Installation Instructions
DSE2157 Operator Manual

PART NO'S
053-034
057-083

DEEP SEA ELECTRONICS PLC UK

Highfield House, Hunmanby Industrial Estate, Hunmanby YO14 0PH
TELEPHONE +44 (0) 1723 890099 **FACSIMILE** +44 (0) 1723 893303
EMAIL sales@deepseapl.com **WEBSITE** www.deepseapl.com

DEEP SEA ELECTRONICS INC USA

3230 Williams Avenue, Rockford, IL 61101-2668 USA
TELEPHONE +1 (815) 316 8706 **FACSIMILE** +1 (815) 316 8708
EMAIL sales@deepseausa.com **WEBSITE** www.deepseausa.com